



# DEGASi® PREP


This is the vacuum degassing system for analytical instrumentation and UHPLC/HPLC. It removes dissolved gasses at flow rates up to approximately 50 ml/min per channel. Built for the rigorous of modern preparative and semi-prep scale UHPLC/HPLC, its unique design assures reliable continuous operation and the highest level of continuous performance available. The low internal volume of each Systec AF™ channel offers quick equilibration and short startup times compared with PTFE degassers.

*“the best degassing efficiency  
for demanding applications”*

## PRODUCT FEATURES

- Ultra-high degassing efficiency
- Low volume, easy to prime
- Dual lumen design for low-flow resistance
- ZHCR® patented control eliminates baseline fluctuations
- Inert flow path
- Long life expectancy 5+ years continuous (24/7) running capacity
- Continuous vacuum system monitoring to ensure that optimal operational conditions are maintained.

Part Number	Number of Channels	Channel Volume (ml)	Approximate max flow per channel (ml/min)	Pressure Drop (mmHg/ml/min)
0001-2053	2	5.3	15	0.02
0001-6484	Replaced by	0001-0220		

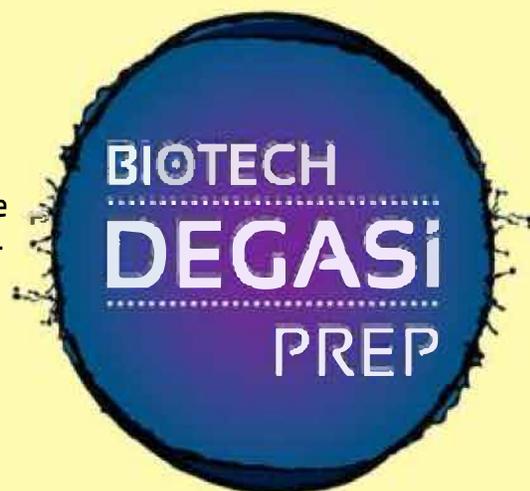

## GENERAL SPECIFICATIONS

### Degassing Channel Tubing:

Systec AF™ (0.075" ID)

### Maximum Channel Pressure:

70 PSI

### Wetted Materials:

Systec AF™, PEEK, Glass-filled PTFE, Stainless Steel (p/n 2053)

### Liquid Connection:

1/4"-28 UNF threaded flat-bottom port

### Size (L x H x W):

Mod 6484: 296x163x79 mm

Mod 2053: 195x100x175 mm

## POWER REQUIREMENTS USING SUPPLIED AC ADAPTER

24 V Power supply included.

Required input to power supply:

110-240 V 50/60 HZ

Wall Sockets: 4 supplied with AC Adapter, Interchangeable: North America, Japan, U.K., Continental Europe, Australia



77, avenue de Champagne

91420 MORANGIS

Tél. : 33 (0)1 60 19 69 29 Fax : 33 (0)1 60 19 69 25

www.bioserv.fr [info@bioserv.fr](mailto:info@bioserv.fr)